


Revision NO 变更数	Revisions 变更项	Changed 修改者	Date 日期	Approved 确认者	Date 日期
①	Add New Part	Kevin	10/Jun/2010	Kevin	2010-06-13
②	Update Drawing	Martin.Zhu	13/Mar/2016	Kevin	2016-03-13
③	Modify Hole Size	Martin.Zhu	8/Nov/2016	Kevin	2016-11-08
④	Add Meterial&Change Drawing NO	Yancey.Yu	2018-11-08	Kevin	2018-11-08

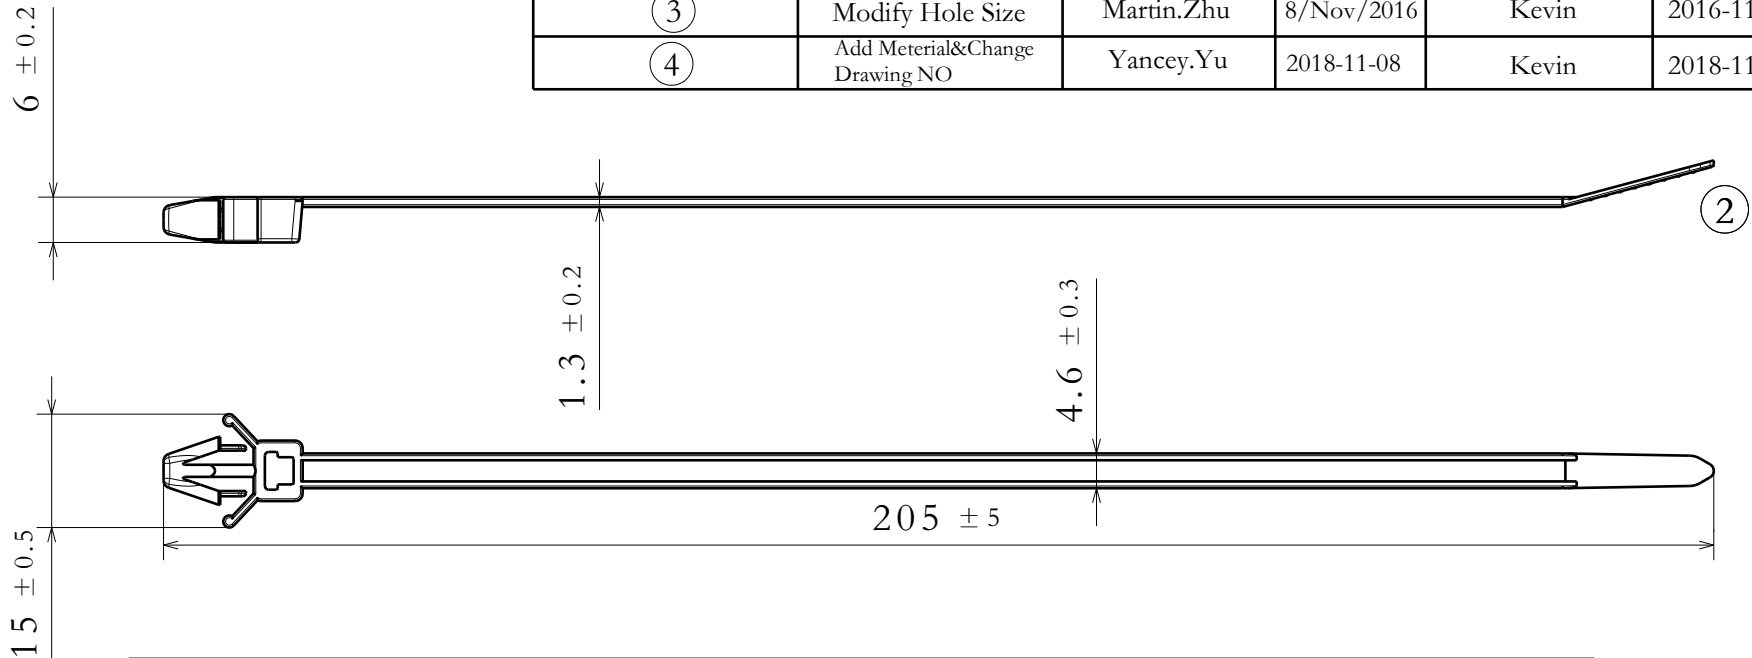

Code 型号	Material 材料	Continuous Operation Temperature 适用温度	Color 颜色	Flame Rating 耐燃性	Weight 质量
T50RSFM-HSB	PA66HSB	-40℃ -105℃	Black	UL94-V2	1.6
T50RSFM-HS	PA66HS	-40℃ -105℃	Light Green	UL94-V2	1.6
T50RSFM-B	PA66B	-40℃ -85℃	Black	UL94-V2	1.6
T50RSFM	PA66	-40℃ -85℃	Milky White	UL94-V2	1.6
T50RSFM-HIRHS	PA66HIRHS	-40℃ -105℃	Black	UL94-HB	1.6

Panel Thickness
适用板厚

0.7-3.0mm

Hole Size
适用孔径

Φ6.1-6.6mm ③
HEX6.35 ± 0.25mm

Tensile
环形拉断力

225N

Bundle Dia
捆绑直径

1.5-45mm

Dimension Units
尺寸单位mm

PERFORMANCE
性能
SPECIFICATION
标准

The copyright of this drawing is reserved by
HellermannTyton.
it is issued on condition that it is not
reproduced,copied or disclosed to a third
party,either wholly or in part, without the
consent of
HellermannTyton.

Drawn/制图 HuangSheng 10/Oct/2009
Approved/审核 Kevin.Tang 10/Oct/2009

HellermannTyton
海尔曼太通（无锡）电器配件有限公司
(WUXI) Electrical Accessories Co.,Ltd.
Tel:+86-510-5282536
Fax:+86-510-5280112

Scale/比例 1:1

Title/品名 **T50RSFM**

Drawing-No/图号 01-0173-001-CSC ④
Format/格式 A4