

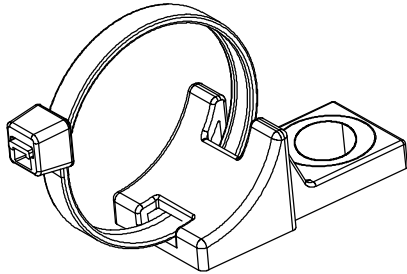


Locking Example

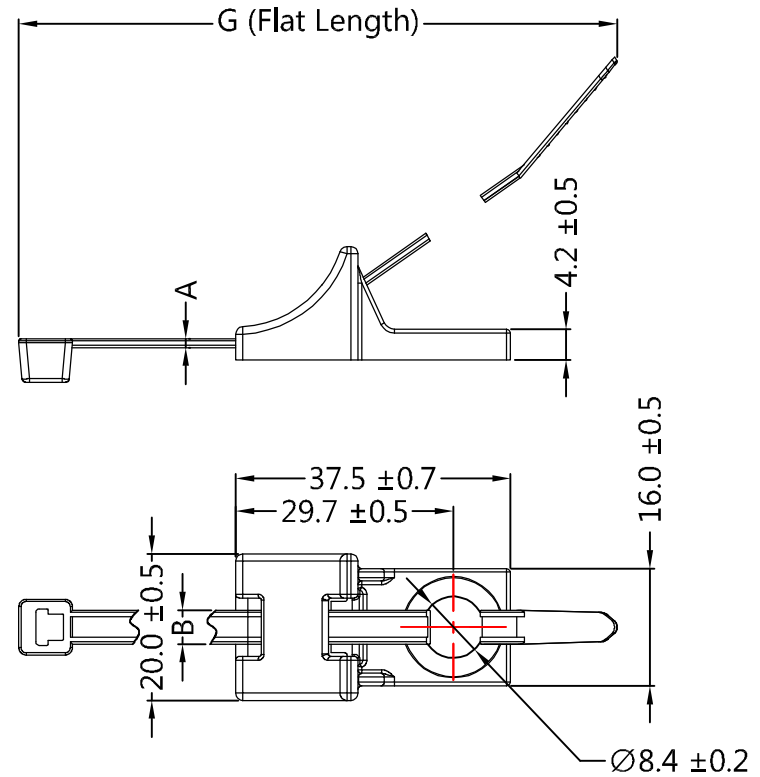

Delivery condition

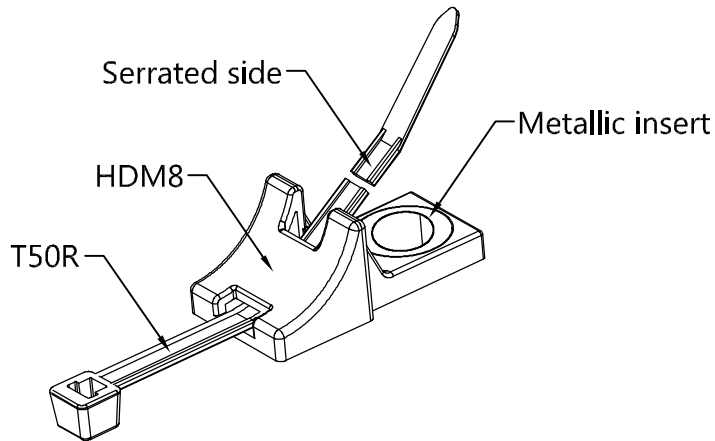

Reference:

1. Cable tie min loop tensile strength 225 newtons (50 lbf)

Notes:


Material: PA 66

Material: PA 46

Metallic insert material: S300PB

A	B	G
1.2 ± 0.2	4.6 ± 0.2	202 ± 11

Revision Level			Revision Record
Drawing	State	Part	ECN #SG11008-02
00.0	Released	.	
Changed	Date (YYYY/MM/DD)		
Simon Ng	2019/11/08		
Approved	Date (YYYY/MM/DD)		
Edward Tan	2019/11/08		



All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Units
mm

HellermannTyton

www.HellermannTyton.com

Drawn	Date (YYYY/MM/DD)
Mandy Ong	2011/06/17
Approved	Date (YYYY/MM/DD)
Edward Tan	2011/06/17

Title

T50RHDM8

Drawing-No

07-0396-008-CSH

Scale 1 : 1

Global Project Number
07-0396

Format A4

Sheet 1 / 1