


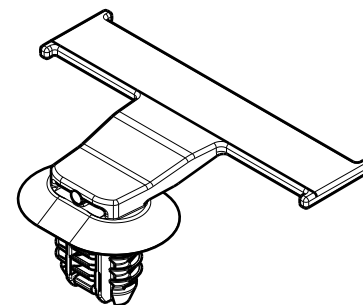



CATIA V5

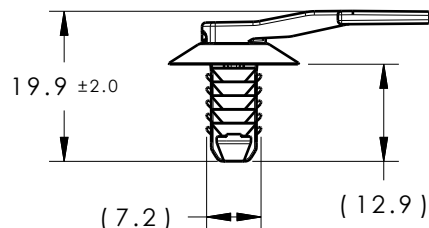

Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
07.3	Design Release	-	SEE ECN# 311925	PP	03/06/25	EJH	03/06/25

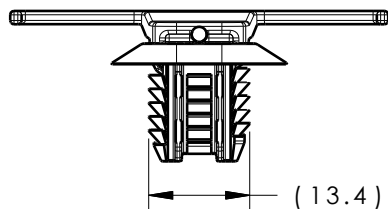

ISOMETRIC VIEW

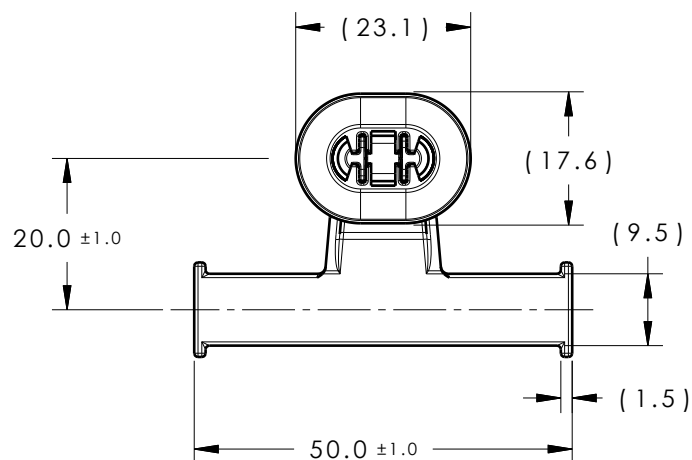

07.3

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
2. FIR TREE PULL OUT FORCE: REF. 25 LBS MIN IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
3. SHEET METAL THICKNESS RANGE: 0.60mm - 6.75mm
4. APPLICABLE OVAL HOLE SIZES:
 - A. 6.2x12.2 +/-0.2mm
 - B. 6.5x12.5 +0.2/-0.4mm
 - C. 6.5x13.0 +/-0.2mm
 - D. 7.0x12.0 +/-0.2mm
5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%

PART DESCRIPTION	TYPE	MATERIAL	COLOR
SOC11FTOVAL-PA66HIRHSUV-BK	SOC11FTOVAL	PA66HIRHSUV	BLACK
SOC11FTOVAL-PA66HIRHS-NA	SOC11FTOVAL	PA66HIRHS	NATURAL

Material SEE CHART COLOR: SEE CHART	Units millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	SJA	11/17/10	Article/Type-No	SEE CHART	Scale	1:1
	Tolerance defined on each dimension		Approved	WPT	03/10/11	Title	OVAL HOLE TAPE CLIP - 20mm OFFSET	Project Number 10-0979	
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH
						10-0979-001-CSU		Sheet	1/1