


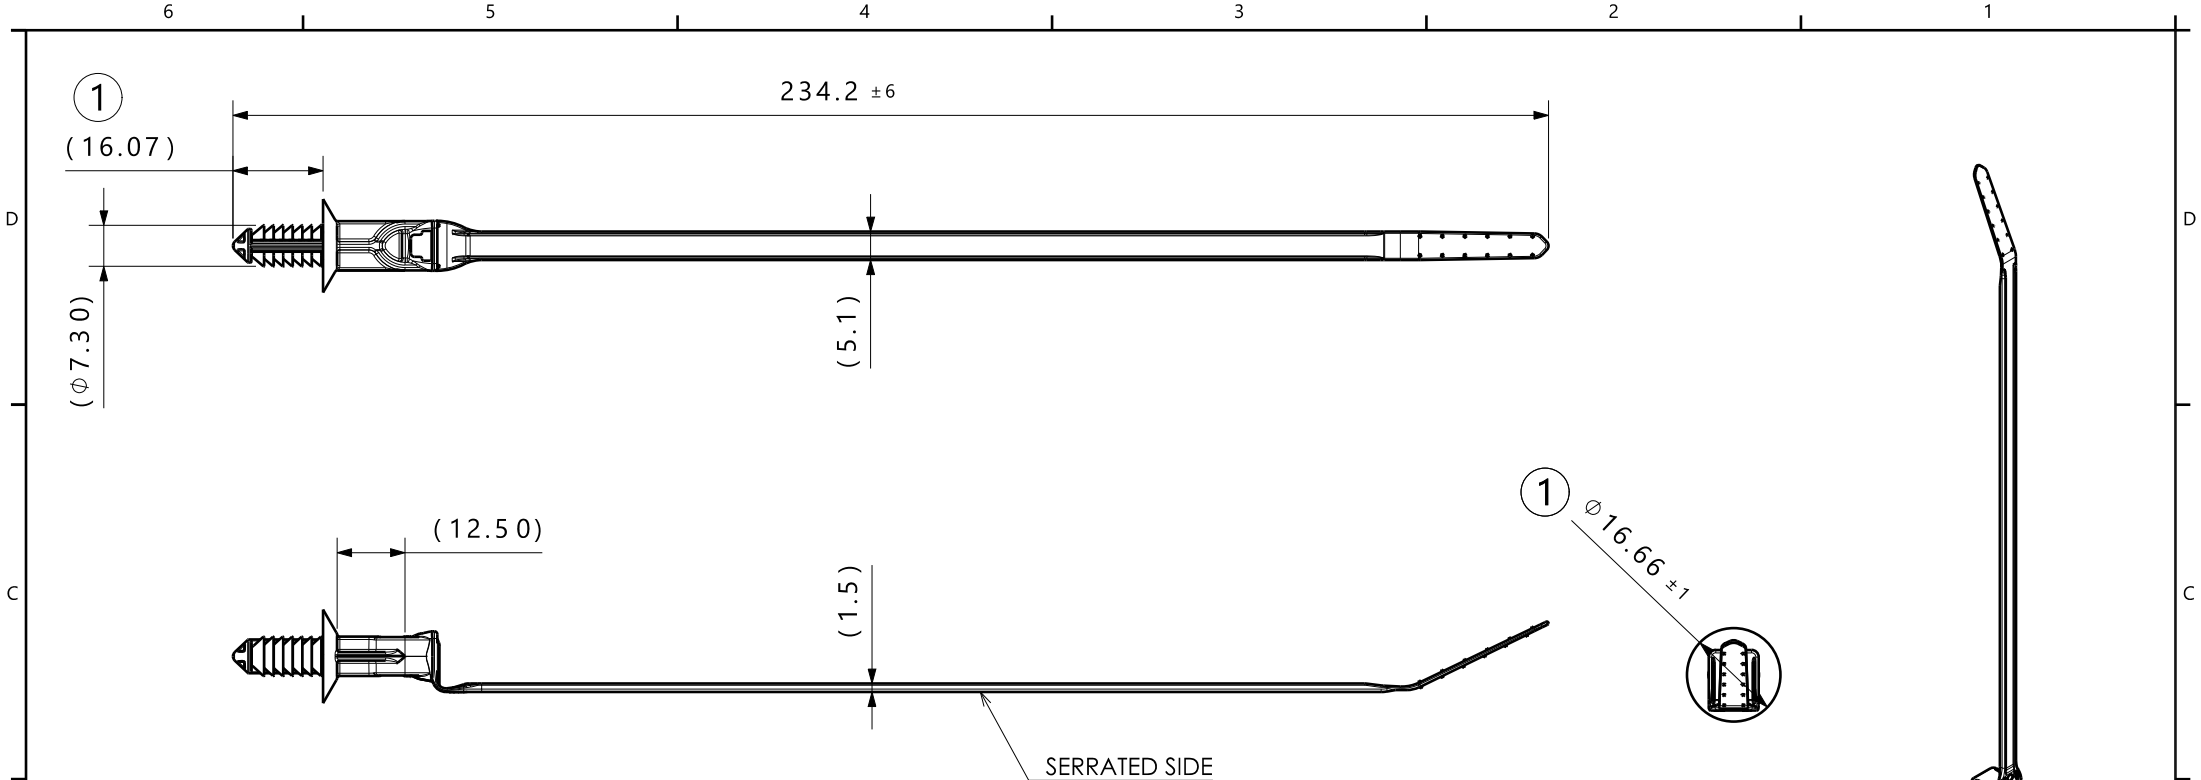

REFERENCE:
PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.

Product Type	Material	Color	SHEET METAL THICKNESS RANGE	APPLICABLE HOLE SIZE	BUNDLE RANGE	TENSILE FORCE
T50ROSFT612.5SO	PA66HIRHSUV	Black	0.6-6	6.5±0.4	Φ2-Φ50	Min225N
	PA66HIRHS	Gray				

A	Revision Level			Revision Record		 	The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title			Scale 1:1	
	Drawing	State	Part	Two dimension change: 16.1 to 16.07 16.7 to 16.66				Ziv.Zhu	2021/08/19					
	01.1	Design Release				Approved		Date (YYYY/MM/DD)	Drawing-No 13-0226-001-CSC					
	Changed		Date (YYYY/MM/DD)			Roger.Chang		2021/08/19						
	Ziv.Zhu		2023/03/02	Units	mm	HellermannTyton	www.HellermannTyton.com							
	Approved		Date (YYYY/MM/DD)	Sheet				1 / 1						
Roger.Chang		2023/03/02	All drawing revisions are stored in CAD PDM database											
6			5		4	3		2		1				